




The GM 34 sliding gate operators are used to drive sliding gates for residential and industrial uses. The operators can be fitted with gear wheel or chain wheel according to your needs, and featured with powerful starting strength, capable of overwork at short time. In case of power failure, an emergency release key allows operate gate manually.

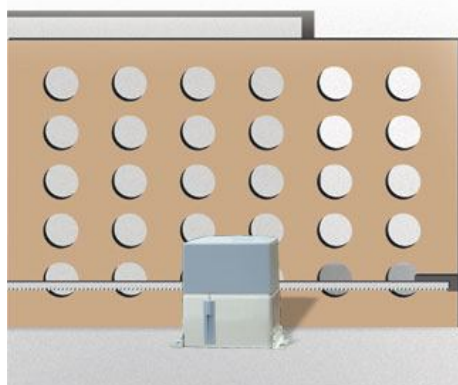

### Advanced Features

- ◆ Gear-drive or chain-drive is optional
- ◆ Magnetic or spring limit switch is optional
- ◆ Self-locking electromechanical gear motor keeps complete close
- ◆ Motor torque adjustment
- ◆ Stop on closing if it hits obstruction
- ◆ Overheat & Overload dual protection
- ◆ Emergency release key in case of power failure
- ◆ Wiring terminals for alarm lamp, remote controller, photocells, loop detector and IC card, etc.
- ◆ Available in DC24V version, which can be operated by two storage batteries DC12V each.



Model	GM 12
Power supply	220-240V, 50/60Hz
Motor	AC motor
Motor power	320 W
Max. Gate weight	600 kg
Opening speed	14 m/min
Working temperature	-25°C to 70°C
Limit switch	Magnetic switch